




Reliable Rock Drill

Designed for tunnel and roadway excavation, while also taking into account anchor rod construction.

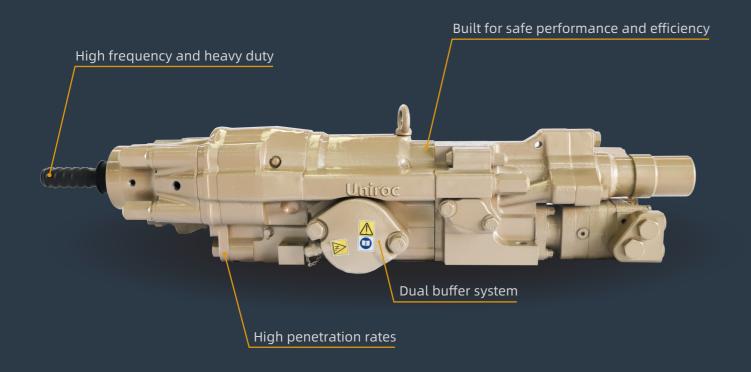

Main features:

- 1# High torque output, minimizing the risk for jamming.
- 2# Double buffering system, maximizing capacity to absorb shock wave recoil.
- **3#** High impact frequency, reducing drill bit and drill pipe losses.



This rock drill has a heavy-duty design that makes it easy to drill even highly hard rock.



Specialized maintenance tools to ensure excellent performance and safe use of the rock drill.



Two preventive maintenance packages are available to ensure rock drill service life.

Technical Specifications

Dimensions And Weight		
Weight	189kg	
Length without shank adapter	1010mm	
Width including connectors	255mm	
Height	255mm	
Height over drill center	88mm	

Impact Ratings			
	U1838HD+	U2238HD+	
Impact power (maximum)	18kW	22kW	
Input power to rock drill (maximum)	31kW	37kW	
Hydraulic pressure (maximum)	230Bar	250Bar	
Flow rate	75-92L/min	83-93L/min	
Impact frequency	60Hz	73Hz	

Rotation Motors		
Туре	07 (160cc)	
Rotation range	0-215rpm	
Torque (maximum)	1000Nm	
Working pressure (maximum)	210bar	
Oil consumption	75L/min	

Flushing Flow And Pressure		
Flushing water pressure (maximum)	25bar	
Lubricating air consumption at 2 bar	5L/s	
Flushing water consumption*	55-120L/min	
* Flushing water consumption depends strongly upon hole diamater, bit type, drill rod size and rock hardness.		

Service Kits			
	U1838HD+	U2238HD+	
Seal kit	U00900000004	U0090000008	
Minor preventive maintenance kit	U00900000003	U0090000007	
Major preventive maintenance kit	U0090000002	U0090000006	

Shank Adapters			
	U1838HD+ / U2238HD+ Drifting	U1838HD+ / U2238HD+ For extension drilling	
R38	200100001541	200100001542	
T38	20117001573	200100001540	

Rock Drill U1838HD+, U2238HD+